

COMMERCIAL STANDARD REFERENCE WINDOW 1230mm x 1480mm – single pane vent.

THERM. SIMULATION

W20 Range: Hot Rolled Steel Profiles.

W8 – Outer / W5 Inner.



16mm double glazed unit: –

4mm Planilux – 8mm 90%

Krypton – 4mm Planitherm One
or Planitherm 4S

8mm Edgetech Super Spacer

Standard with Butyl secondary
sealant

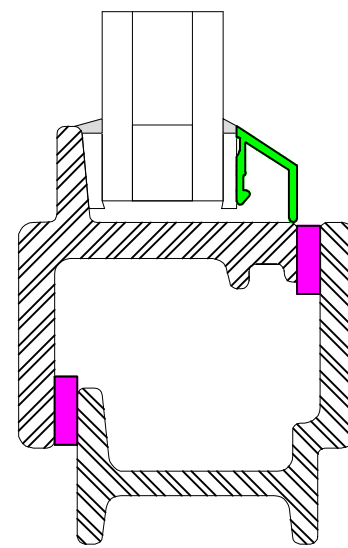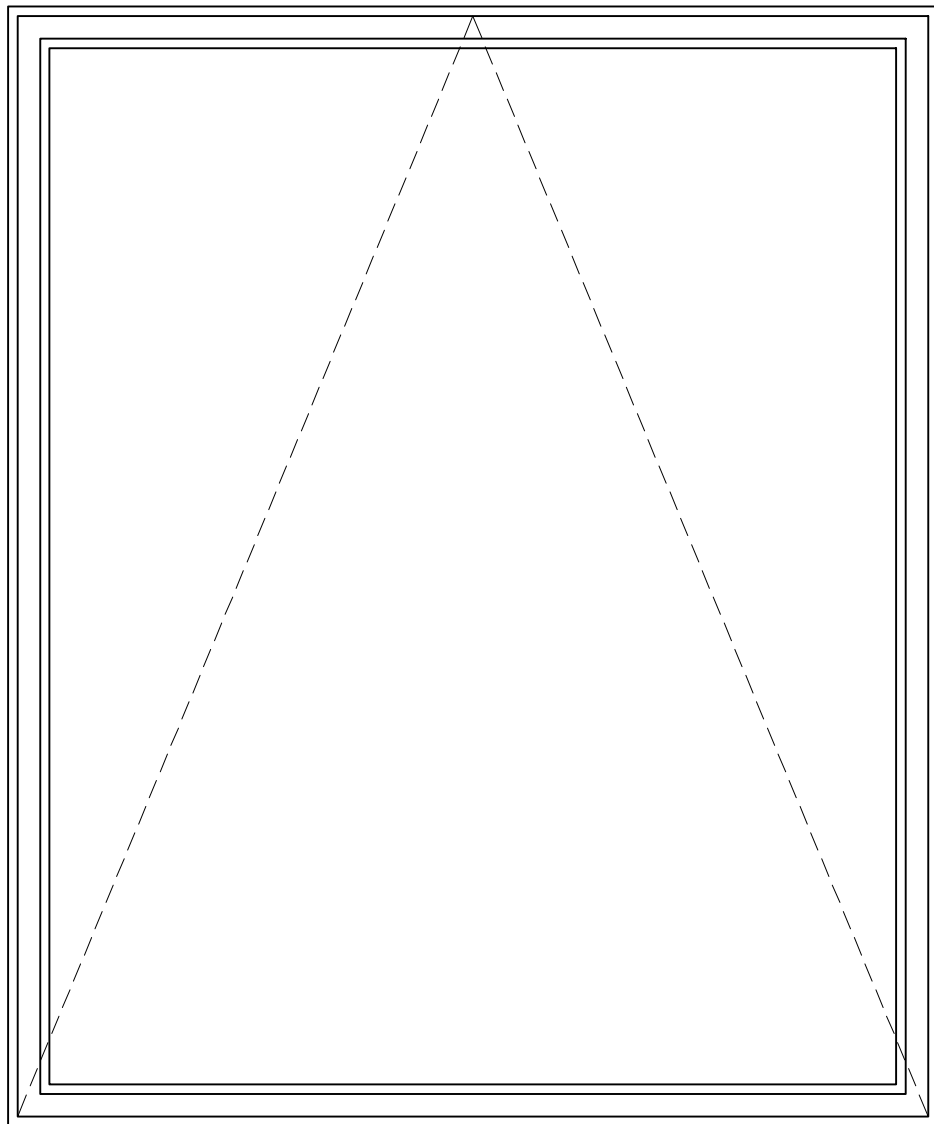

Scale 1:1



Mild Steel



Aluminium



KISO 141. PE Foam Seal
3mm x 9mm



PE. Foam Glazing Seal



Silicone Top Cap



42 Heath Street
Tamworth
Staffordshire
B79 7JH
Tel: +44 (0) 844 249 1355
info@steel-window-association.co.uk

Title: W20 RANGE – COMMERCIAL STANDARD REFERENCE WINDOW

Date: JAN 2014

Drawn By: ITL

Status: FOR THERMAL SIMULATION – JAN 2014

Scale @ A3:

Drwg No: SWA-W20-008

Rev: