


COMMERCIAL/DOMESTIC STANDARD REFERENCE DOORS

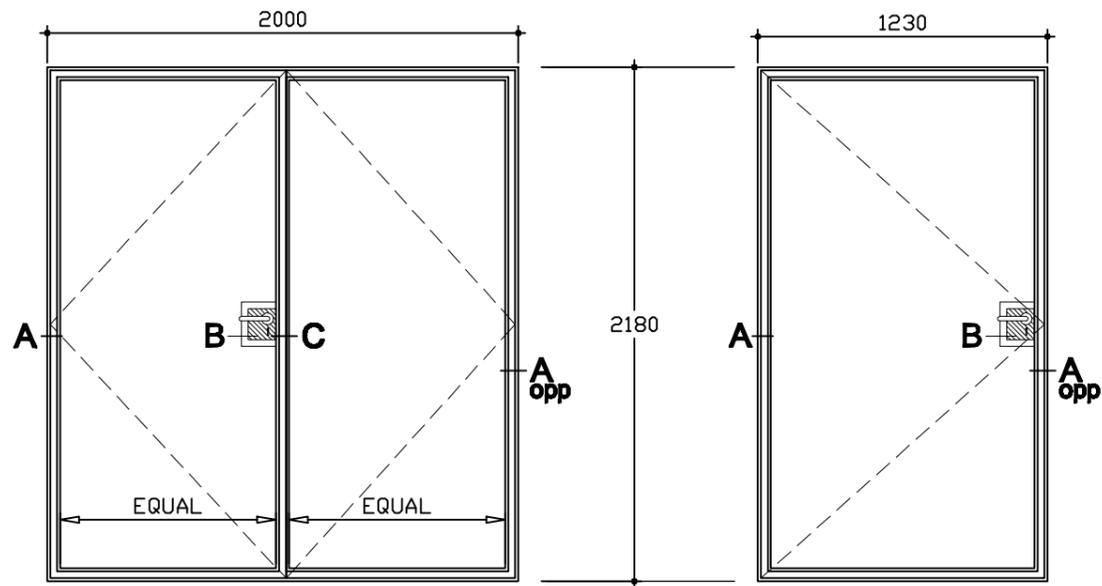

THERMAL SIMULATION
W20 Range: Hot Rolled
Steel Profiles.

16mm double glazed safety unit: -
4mm Pilkington Optitherm S1 PLUS
8mm Krypton gas fill 90%
4mm Pilkington K glass OW
8mm Edgetech Super Spacer
Standard with Butyl secondary
sealant

-  Mild Steel
-  Aluminium
-  KISO 141. PE Foam
Seal 3mm x 9mm
-  P.E. Foam
Glazing Seal
-  Silicone Top Cap
& Perimeter Pointing
-  Bedding Compound
-  Panel Insulation -
Polystyrene

