


COMMERCIAL/DOMESTIC STANDARD REFERENCE DOORS









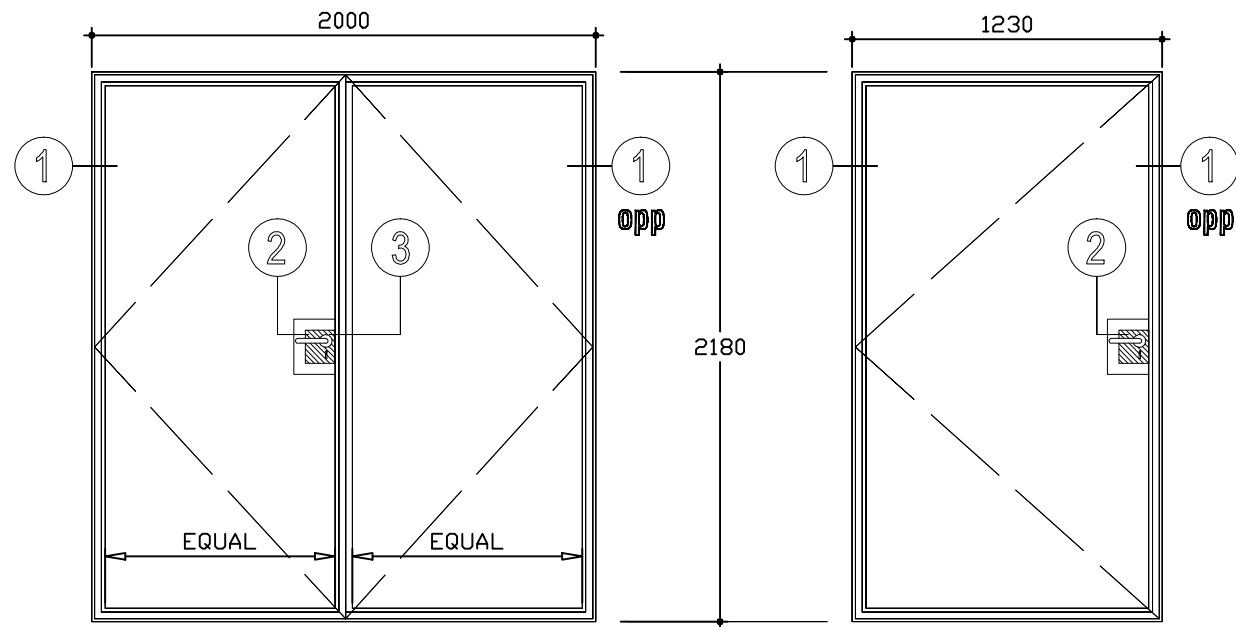


THERMAL SIMULATION

W40 Range: Hot Rolled Steel Profiles.

28mm triple glazed unit: -

4mm Planitherm 4S (or One)-8mm 90% Krypton-4mm Clear Float-8mm 90% Krypton-4mm Planitherm 4S or One.
8mm Edgetech Super Spacer Standard with Butyl secondary sealant

-  Mild Steel
-  Stainless Steel
-  P.E. Foam Airseal
-  PVC Wedge Gasket
-  KISO 141. PE Foam Seal 3mm x 9mm
-  P.E. Foam Glazing Seal
-  Silicone Top Cap & Perimeter Pointing
-  Bedding Compound
-  Panel Insulation - Polystyrene

