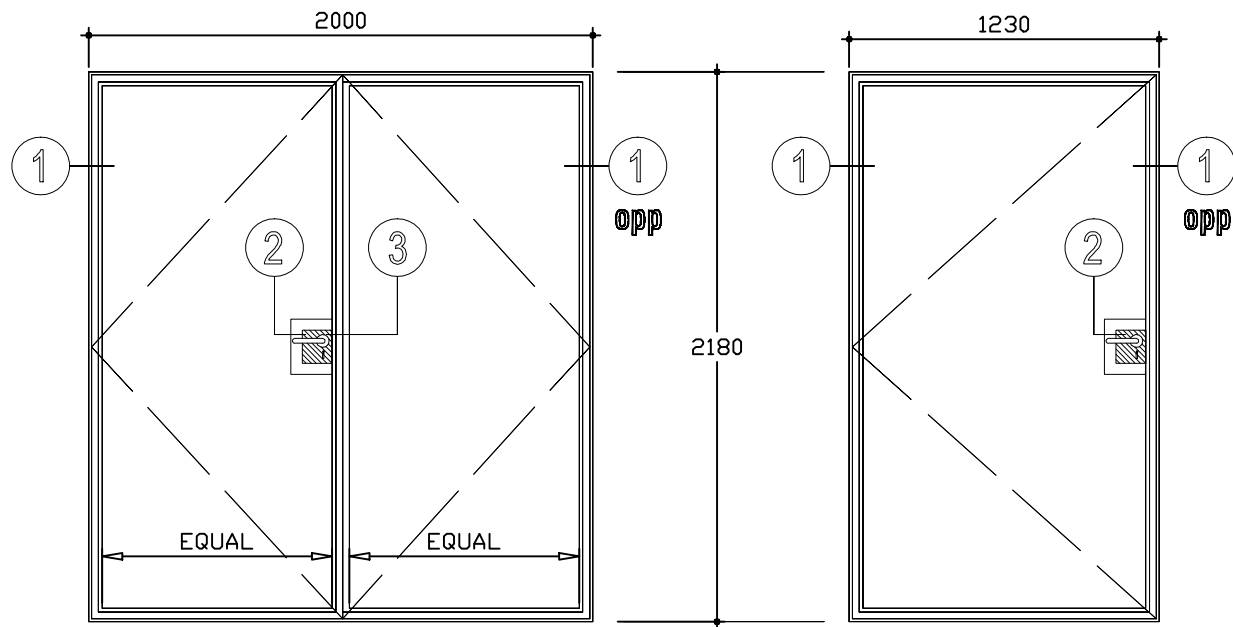


# COMMERCIAL/DOMESTIC STANDARD REFERENCE DOORS












## THERMAL SIMULATION

W40 Range: Hot Rolled Steel Profiles.

28mm triple glazed unit:—

4mm Planitherm 4S (or One)—8mm 90% Krypton—4mm Clear Float—8mm 90% Krypton—4mm Planitherm 4S or One.  
8mm Edgetech Super Spacer Standard with Butyl secondary sealant

-  Mild Steel
-  Aluminium
-  P.E. Foam Airseal
-  PVC Wedge Gasket
-  KISO 141. PE Foam Seal 3mm x 9mm
-  P.E. Foam Glazing Seal
-  Silicone Top Cap & Perimeter Pointing
-  Bedding Compound
-  Panel Insulation — Polystyrene

