


# COMMERCIAL/DOMESTIC STANDARD REFERENCE WINDOWS

**Domestic S.R.W.**

**Commercial S.R.W.**

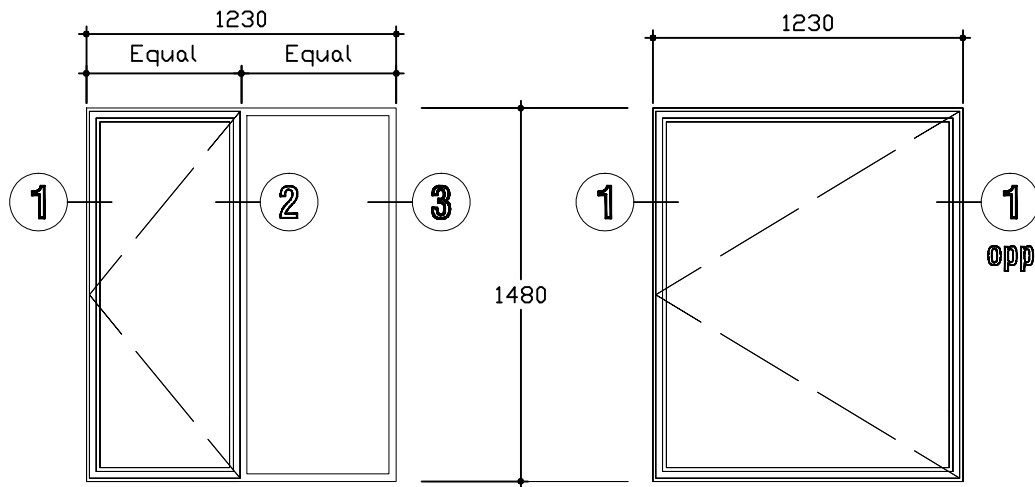

## THERMAL SIMULATION

W40 Range: Hot Rolled Steel Profiles.

28mm triple glazed unit:—

4mm Planitherm 4S (or One)—8mm 90% Krypton—4mm Clear Float—8mm 90% Krypton—4mm Planitherm 4S or One.  
8mm Edgetech Super Spacer Standard with Butyl secondary sealant

-  Mild Steel
-  Stainless Steel
-  P.E. Foam Airseal
-  PVC Wedge Gasket
-  KISO 141. PE Foam Seal 3mm x 9mm
-  P.E. Foam Glazing Seal
-  Silicone Top Cap & Perimeter Pointing

